



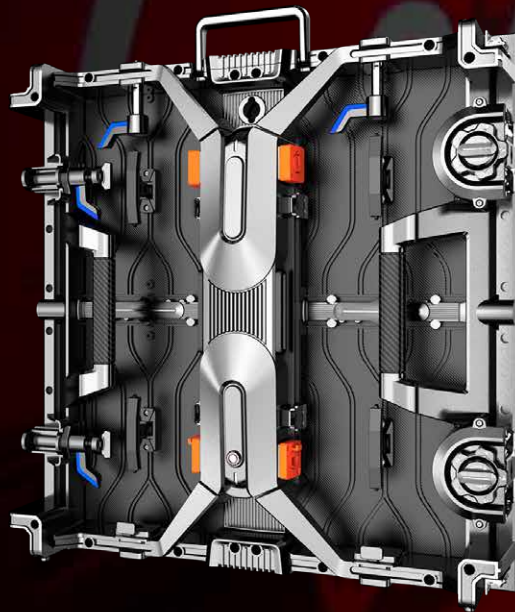



Specs

型号	硬模组										软模组			
	户内					户外					户内			
点间距 (mm)	1.5625	1.953	2.5	2.6	2.9	3.9	2.6	2.9	3.91	4.81	1.953	2.6	2.9	3.9
LED 灯珠	SMD1515	SMD1415	SMD1515	SMD1515	SMD1515 SMD2020	SMD1515	SMD1415	SMD1415	SMD1921	SMD1921	SMD1415	SMD1515	SMD1515 SMD2020	SMD1515
像素密度 (点/㎡)	409,600	262,144	160,000	147,456	112,896	65,536	147,456	112,896	65,536	43,264	262,144	147,456	112,896	65,536
亮度 (cd/㎡)	800-1000	800-1000	800-1000	800-1000	800-1000	800-1000	4,000-4,500	4,000-4,500	4,000-4,500	4,000-4,500	800-1000	800-1000	800-1000	800-1000
模组尺寸 (W x H mm)	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250	250x250
模组分辨率 (点)	160x160	128x128	100x100	96x96	84x84	64x64	96x96	84x84	64x64	52x52	128x128	96x96	84x84	64x64
箱体尺寸 (W x H mm)	500x500	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000
箱体分辨率 (点)	320x320	256x512	200x400	192x384	172x344	128x256	192x384	172x344	128x256	104x208	256x512	192x384	172x344	128x256
箱体重量 (kg/pc)	7.2kg	10.5kg	10.5kg	10.5kg	10.5kg	10.5kg	10.5kg	10.5kg	10.5kg	10.5kg	4kg	4kg	4kg	4kg
箱体材质	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁	压铸镁
可弯曲角度	Hard Connector: -6°, -3°, 0°, 3°, 6° Soft Connector: -10°, -7.5°, -5°, -2.5°, 0°, 2.5°, 5°, 7.5°, 10°, 12.5°, 15°													
功耗 (w/㎡)	450/150	450/150	450/150	450/150	450/150	450/150	700/233	700/233	700/233	700/233	450/150	450/150	450/150	450/150
刷新率	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
灰度等级	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits	14 bits
防水等级	IP30	IP30	IP30	IP30	IP30	IP30	IP65	IP65	IP65	IP65	IP30	IP30	IP30	IP30
扫描	1/32	1/32	1/25	1/24	1/21	1/16	1/24	1/21	1/16	1/13	1/32	1/24	1/21	1/16

Dimensions

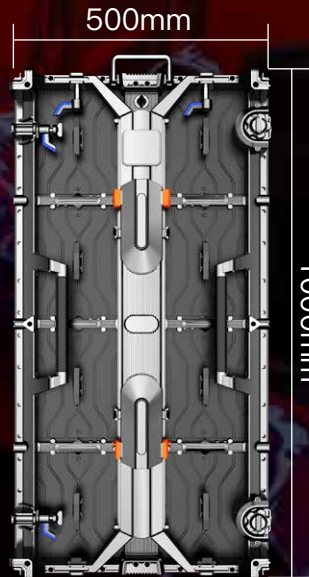


Hard module



Soft Module

IP65 Waterproof (for Outdoor Panel)

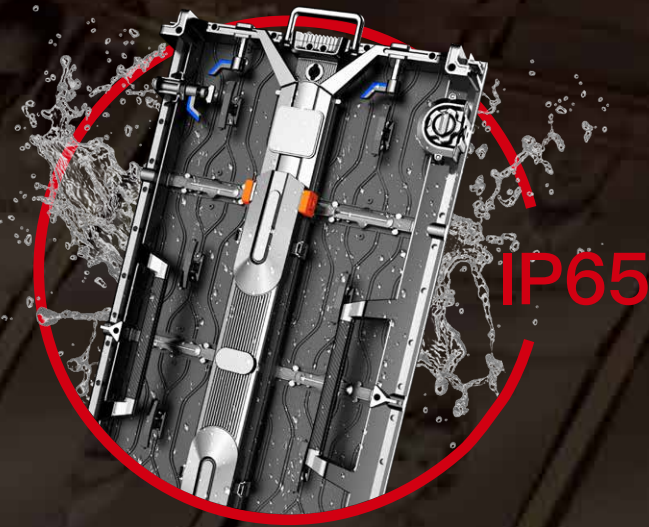

Lightweight: 10.5kg/pc (21kg/m²)




Modular, Front or Rear Maintenance
Modular design, fast front or rear maintenance.



Excellent Cooling


The power & data box is comprised of a magnesium enclosure with large cooling fins & the whole chassis, which rapidly dissipates heat, reducing power consumption and improving component operations. rentPad panels will not discolour on full white even under extreme conditions

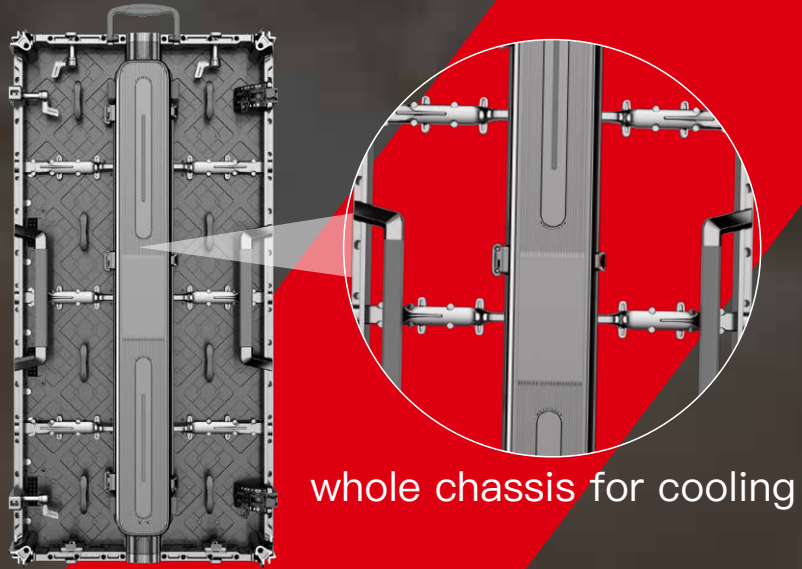

whole chassis for cooling

Fast Installation


The panel accommodates fast construction with its big & lightweight panels, smart latch & itself assisted system, the installation and disassembly are more efficient than regular panels.

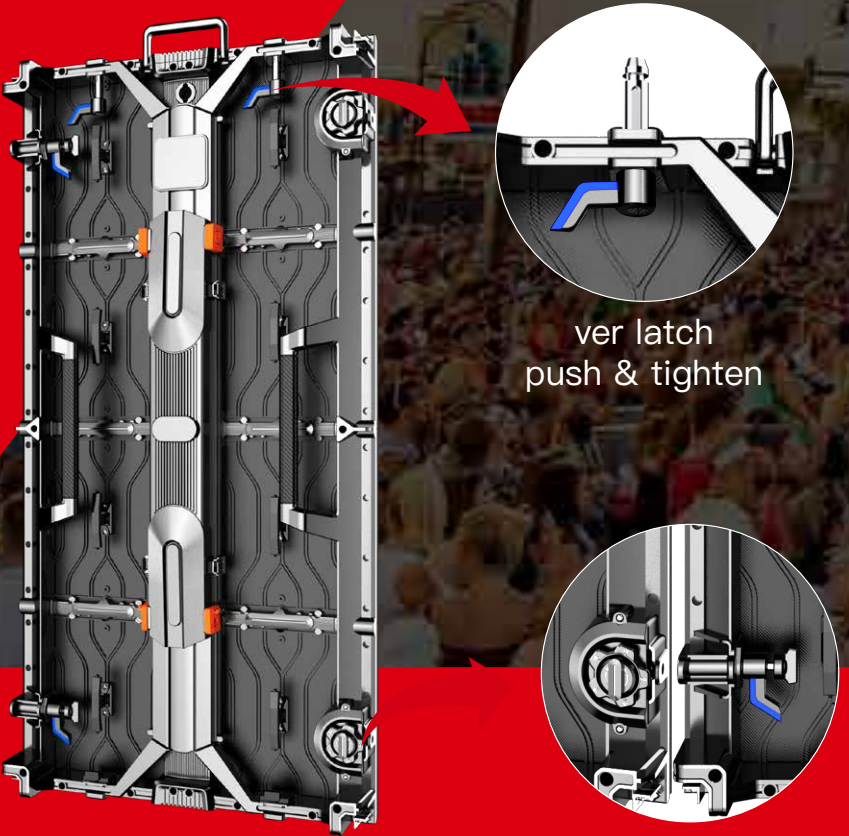


ver latch
push & tighten

hor latch
push, 1/4 turn & tighten


Details of Soft Module Cabinet

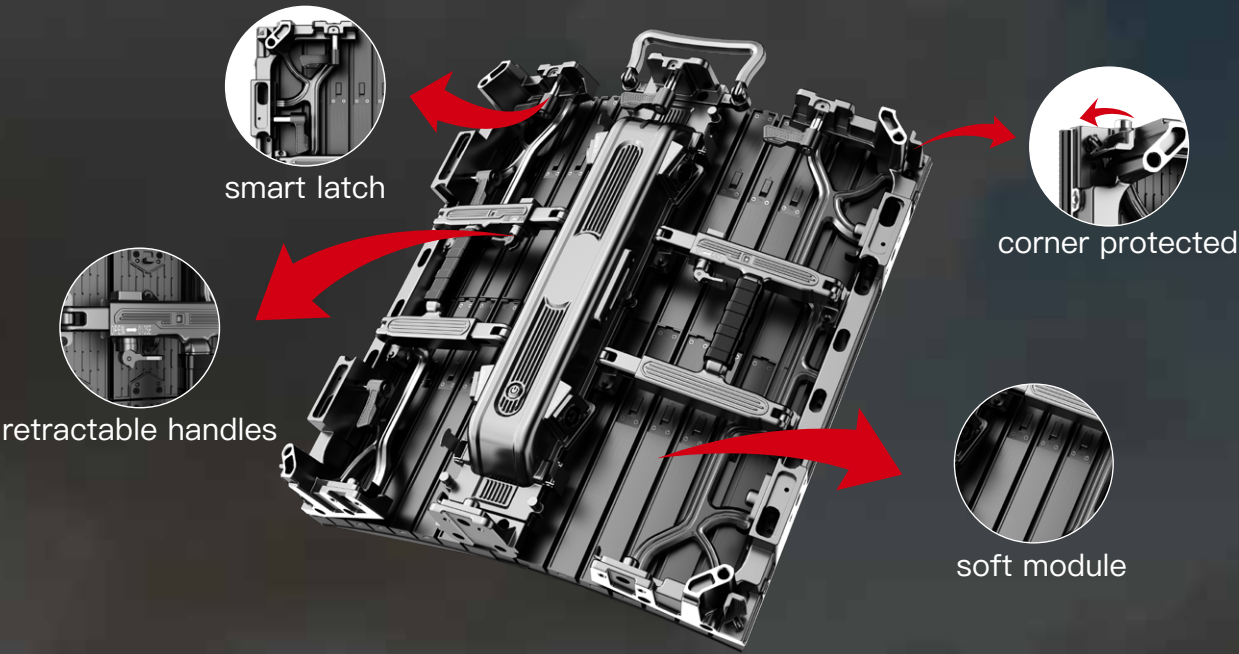

Adjustable Curve

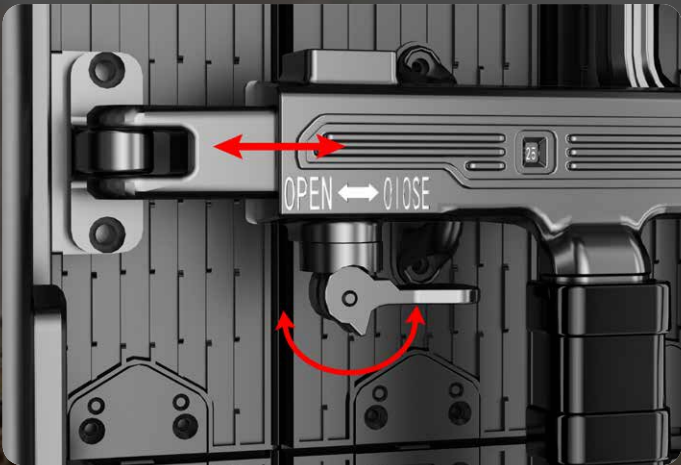

1. Slide the latch left and right to
adjust the angle

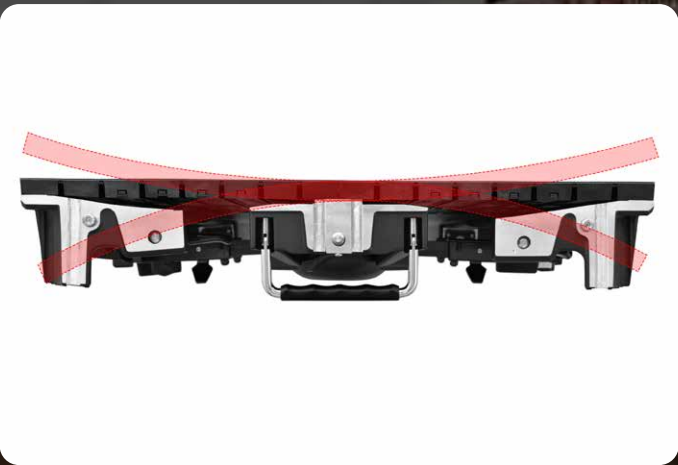

2. Lock the latch



concave

convex

flat

s-type curve

Creative Applications




s-type curve

curve




right angle

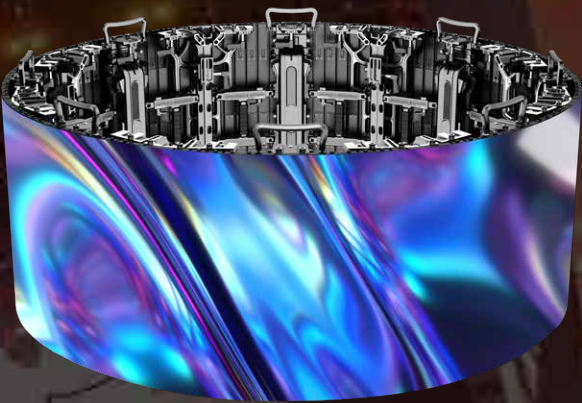


column (min. 8 cabinets)


Three Cabinets Available

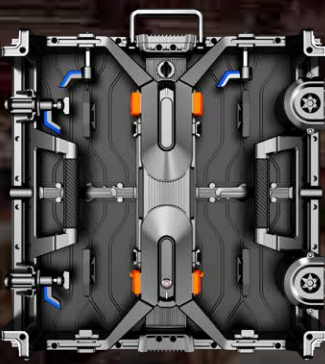

Hard Connector

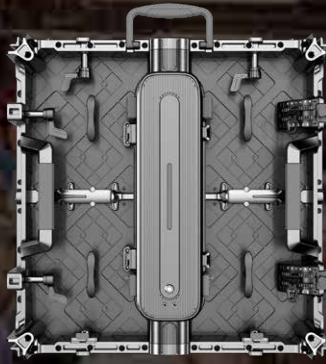

Soft Connector

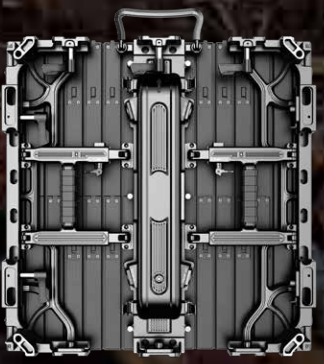

Soft Module