



Specs

Item	Indoor				Outdoor		
Pixel Pitch (mm)	1.5 (GOB)	2.6	2.9	3.9	2.9	3.9	4.8
LED Configuration	SMD1212	SMD1515	SMD2020	SMD2020	SMD1415	SMD1415	SMD1921
Pixel Density (pixels/m²)	409,600	147,456	112,896	65,536	112,896	65,536	43,264
Brightness (cd/m²)	≥800	≥1000	≥1000	≥1000	5,500	5,500	5,500
Contrast	5000 : 1	5000 : 1	4000 : 1	5000 : 1	4000 : 1	6000 : 1	8000 : 1
Module Size (W x H mm)	250x250	250x500	250x500	250x500	250x500	250x500	250x500
Module Resolution (pixels)	160x160	96x192	84x168	64x128	84x168	64x128	52x104
Panel Size (W x H mm)	500x500	500x1000	500x1000	500x1000	500x1000	500x1000	500x1000
Panel Resolution (pixels)	320x320	192x384	168x336	128x256	168x336	128x256	104x208
Panel Weight (kg/pc)	9kg	12kg	12kg	12kg	14.5kg	14.5kg	14.5kg
Cabinet Material	Magnesium	Magnesium	Magnesium	Magnesium	Aluminum	Aluminum	Aluminum
Curveable Angle	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°	-6°, -3°, 0°, +3°, +6°
Power Consumption (w/m²)	420/140	420/140	420/140	420/140	700/233	700/233	700/233
Refresh Rate	3840Hz	3840Hz	3840Hz	7680Hz	7680Hz	7680Hz	7680Hz
Gray Scale	≤14 bits	≤16 bits	≤16 bits	≤16 bits	≤16 bits	≤16 bits	≤16 bits
Ingress Progress	IP30	IP30	IP30	IP30	IP65	IP65	IP65
Scan Ratio	1/40	1/24	1/28	1/16	1/14	1/8	1/8

Dimensions

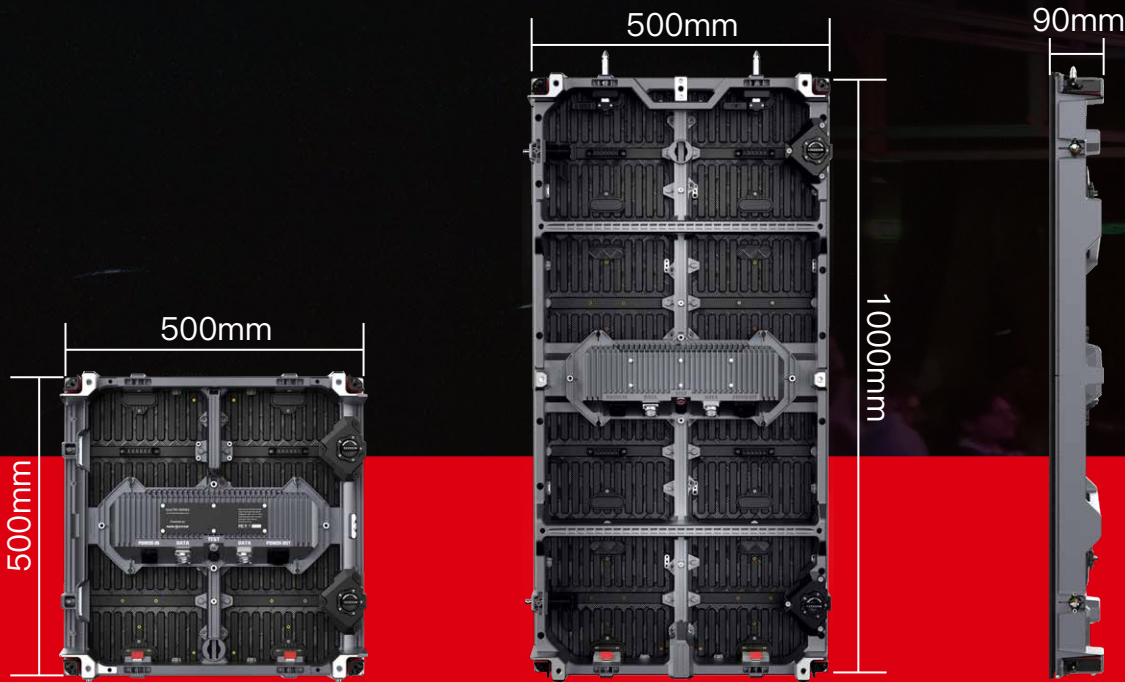


A Complete Hang & Stack System

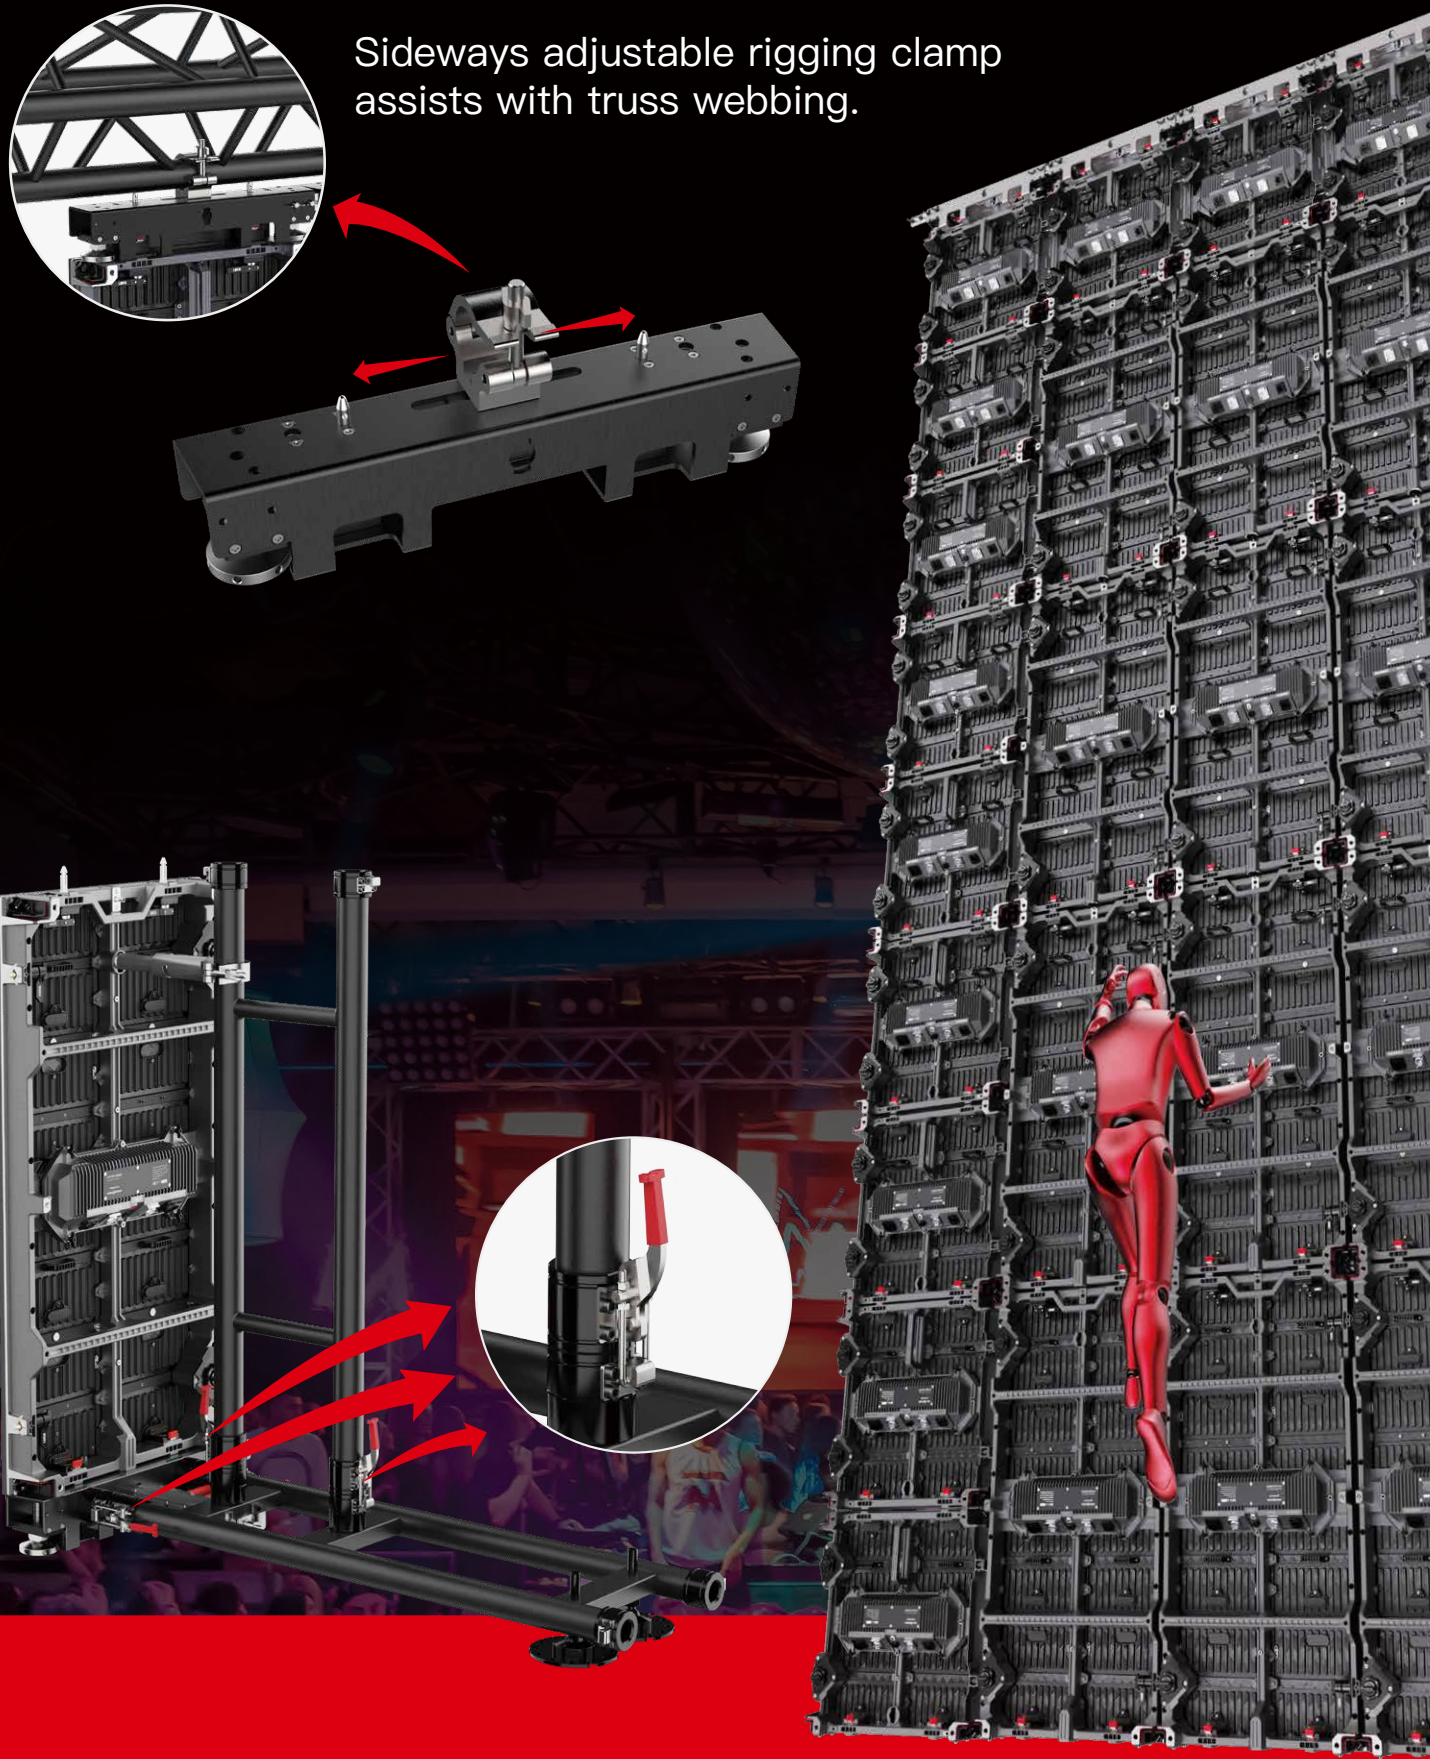

Quatro

Event Production Panel

A Real Outdoor Panel

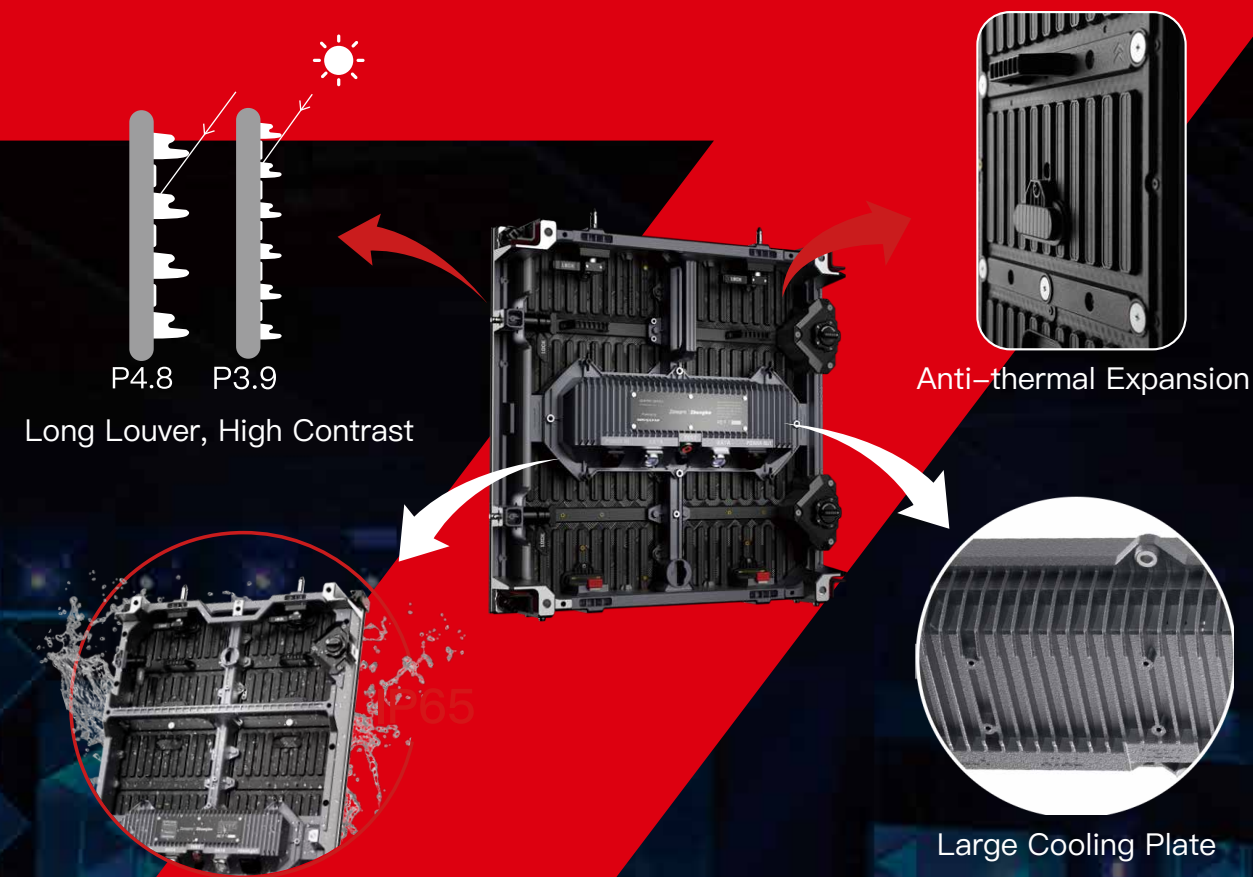

Less Weight, Strong Chassis

The panels is able to hang 26m height.

12 kg/pc


1.9 tons
breaking point

6
safety factor




A Solution of Lightweight & Fast Installing

Quatro accommodates fast construction with its big & lightweight panels, smart & self-assisted latch, one person is able to complete a full assembling work.

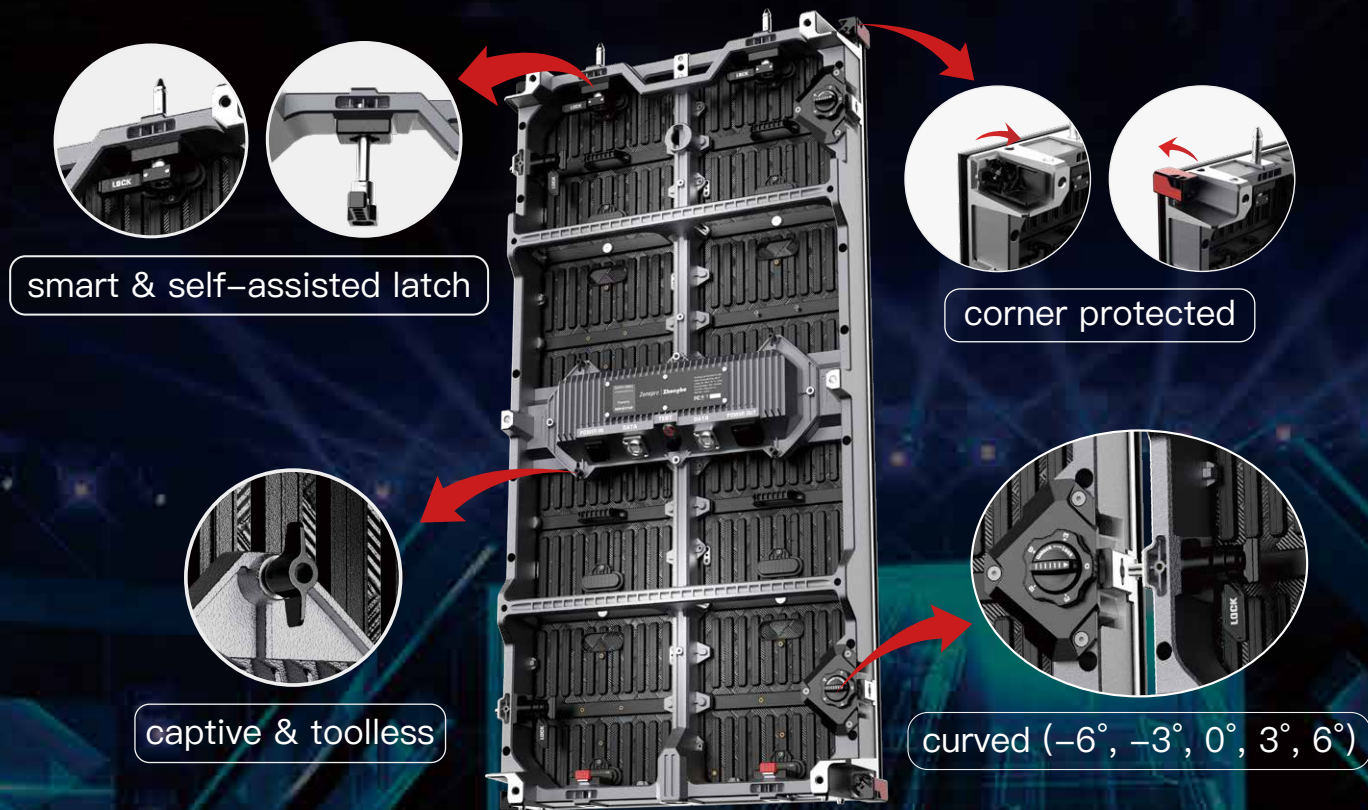


Fast, Modular & Highly Compatible

All parts front and rear serviceable.

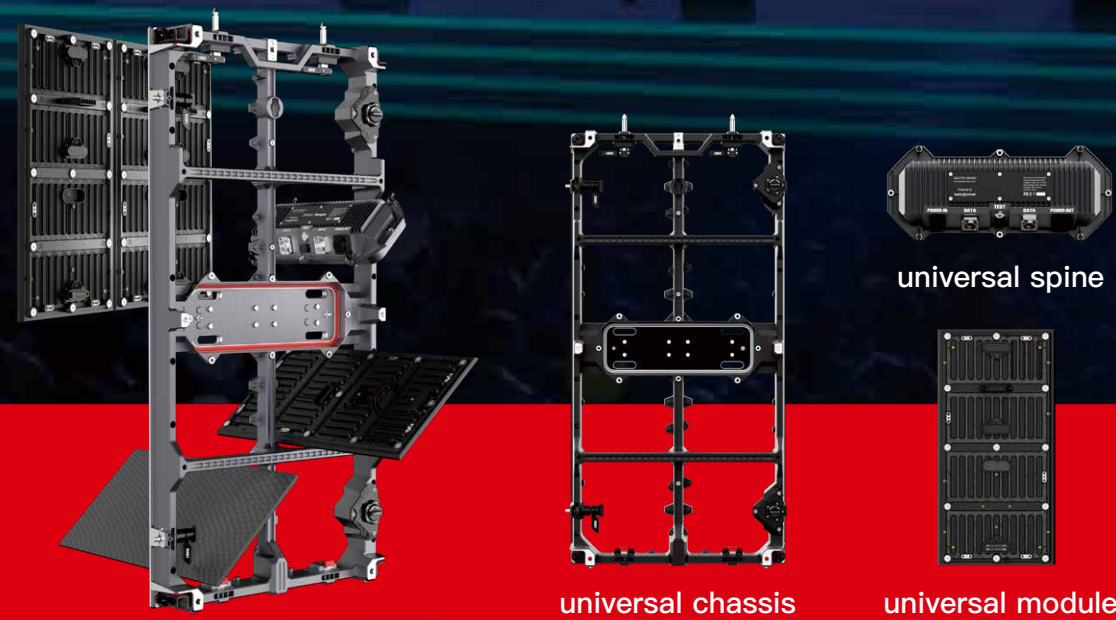

Smart & Simple Wallmount Bracket

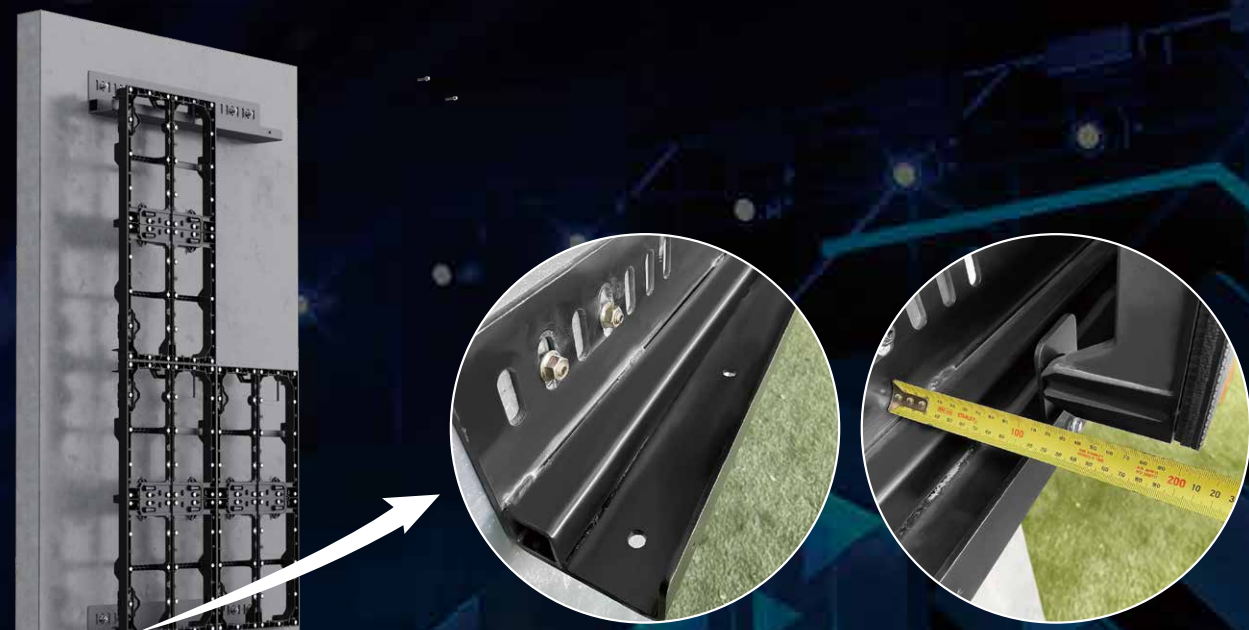

Creative Applications


Quatro allows to realize many creative solutions. In addition to standard use, the panels can be curved, ceiled, right angles... let your imagination be the limitation.



ceiling mounted



curved

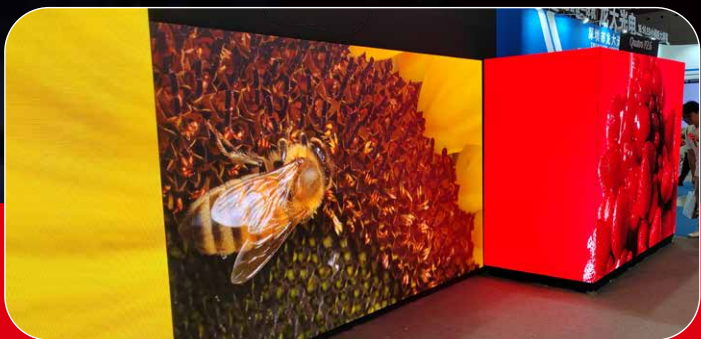

right angle